


Some drilling fluids, especially lime-treated drilling fluids, tend to thicken and in some cases to solidify when left under static conditions in a deep hot hole. This thickening impairs and sometimes prevents drilling and completion operations. Fann High Temperature Aging Cells have been developed to aid in predicting the performance of drilling fluids under static, high temperature conditions. The shear strength test using the weighted Shearometer Cylinder is commonly run on the sample from such a heat and aging test.

### SHEAR STRENGTH TEST


1. Place the stainless steel shear tube on the surface of the sample. Refer to Fig. 1.
2. Place the stainless steel weight platform on top of the shear tube. This weight is 20 grams.
3. Starting with a small gram weight from the weight set, add gram weights until the tube starts to sink into the sample. The tube will stop its downward motion at the point where the shear strength of the gelled sample against the surface of the tube is sufficient to support the applied weight.
4. Measure the length of the tube exposed above the sample (3.5-X in inches). Refer to Fig. 1 and the nomograph.

**CALCULATE SHEAR STRENGTH  
FROM NOMOGRAPH**

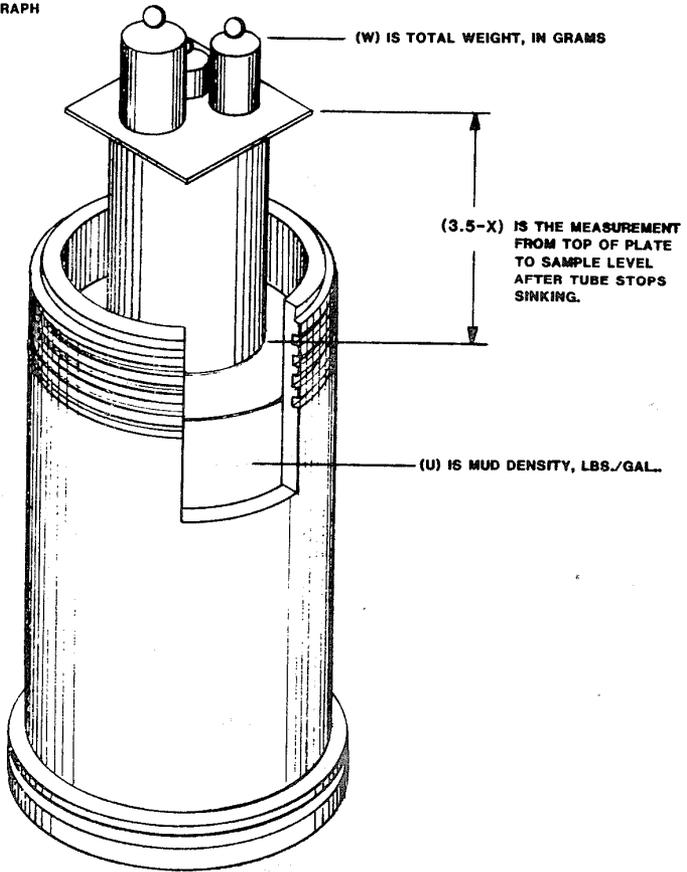


**Measuring Shear Strength**

# NOMOGRAPH FOR CALCULATING SHEAR STRENGTH OF A HIGHLY GELLED DRILLING FLUID




TOTAL SHEAR  
WEIGHT, W  
(G)



SHEAR STRENGTH, S  
(LB/100 FT<sup>2</sup>)

$$S = \frac{3.615 W}{X} - 0.256U$$

THIS NOMOGRAPH WAS DEVELOPED FOR USE WITH A STAINLESS STEEL SHEARMETER TUBE OF:  
 LENGTH = 3.5 IN.  
 WEIGHT = TUBE } 20g  
 PLATE }  
 OUTSIDE DIAMETER = 1.4 IN.  
 WALL THICKNESS = 0.008 IN.  
 A MUD DENSITY U, OF 16 LB/GAL WAS ASSUMED.



LENGTH OF SHEARMETER  
TUBE ABOVE MUD SURFACE  
(INCHES), (3.5-X)

5. The shear strength in pounds per 100 square feet is obtained from the nomograph by utilizing the force, in grams, (20 + gram weights) applied to the shear tube and the length of exposed tube after the tube reaches equilibrium, (3.5-X).
6. This nomograph is based on a sample having a density of 16 lb/gal. Use the equation shown on the nomograph to calculate the shear strength for samples of significantly different densities.

CARE OF SHEAROMETER

Shearometer parts should be cleaned and dried after use.

PARTS LIST

| Part No. | Description                                                          |
|----------|----------------------------------------------------------------------|
| 206958   | Shearometer Tube, Stainless Steel with weight support plate, 20 gram |
| 206967   | Gram weights, Set                                                    |

**REORDER FROM:** **Fann Instrument Company**  
 P O Box 4350  
 Houston, Texas USA 77210  
 Telephone: 281- 871-4482  
 Toll Free: 800-347-0450  
 Fax 281 - 871-4358

Copyright 2007  
**Fann Instrument Company**  
 Houston, Texas, U.S.A.

All rights reserved. No part of this work covered by the copyright hereon may be reproduced or copied in any form or by any means -- graphic, electronic, or mechanical without first receiving the written permission of Fann Instrument Company, Houston, Texas USA

®**FANN** is a registered trademark of Fann Instrument Company.

Printed in USA